



SECRET JARDIN

ASSEMBLY INSTRUCTIONS



INTENSE R4.00

SUMMARY



1 KIT CONTAINS / OPTION SPACE BOOSTER & WEBIT

2 INT480 : CONFIGURATION 1 - MAXIMUM ACCESSIBILITY

3 INT480 : CONFIGURATION 2 - MAXIMUM STRENGTH

4 INT480K : OPTION - SPACE BOOSTER & WEBIT

5 INT600 : CONFIGURATION 1 - MAXIMUM ACCESSIBILITY

6 INT600 : CONFIGURATION 2 - MAXIMUM STRENGTH

7 INT600K : OPTION - SPACE BOOSTER & WEBIT

8 INT480 & INT600 : CANVAS ASSEMBLY / OPENING METHODS

9 INT480 & INT600 : LINKABILITY / BUILDING

PROFESSIONAL

INTENSE 480 & INTENSE 600 R4.00 - KIT CONTAINS

MOBILE FLANGE Ø315MM - 12½"



Ducting Flange Mobile



Cutting Tool

DUCTING FLANGE Ø25MM - 1.00"



Ducting Flange



Cutting Tool

GENERAL



CableIT



StrapIT

CABLE FLANGE Ø70MM - 2.80"




Cable Flange



Cutting Tool



Connectors





Light Baffle

PROFESSIONAL

OPTION SPACE BOOSTER & WEBIT

WITHOUT OPTION

WITH OPTION

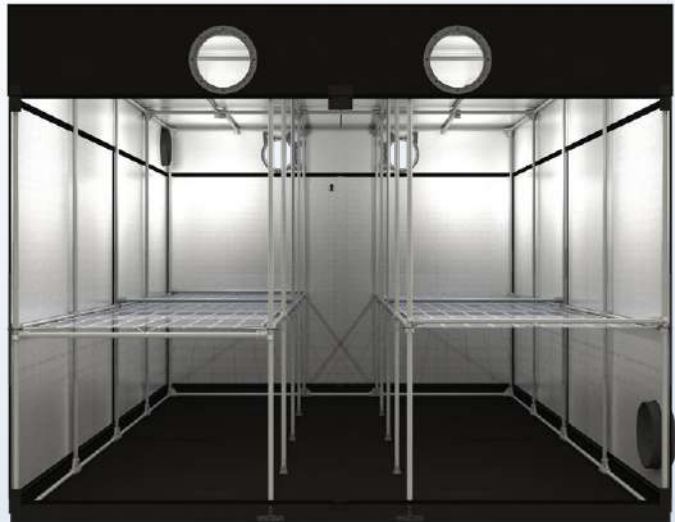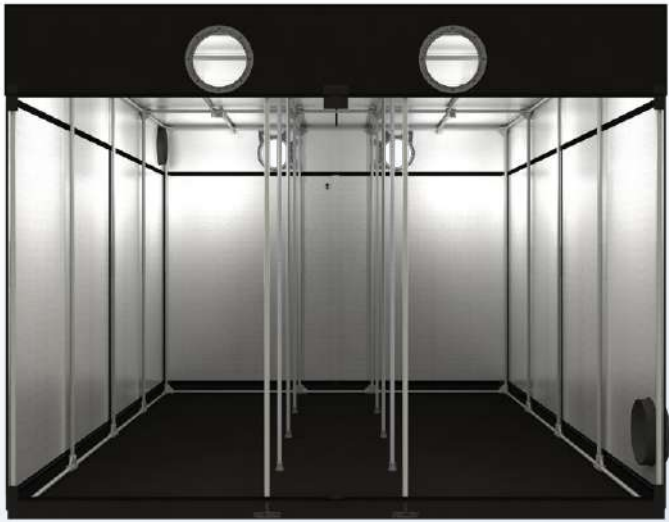

**INT480
INT600**

**INT480 + INT480K
INT600 + INT600K**

**VIDEO ASSEMBLY
INT600 + 600K**

A QR code is centered within a yellow-bordered box. The QR code has a yellow logo in the center, which appears to be a stylized plant or leaf design.


INT480



CONFIGURATION 1
MAXIMUM ACCESSIBILITY

PROFESSIONAL

INTENSE 480 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)

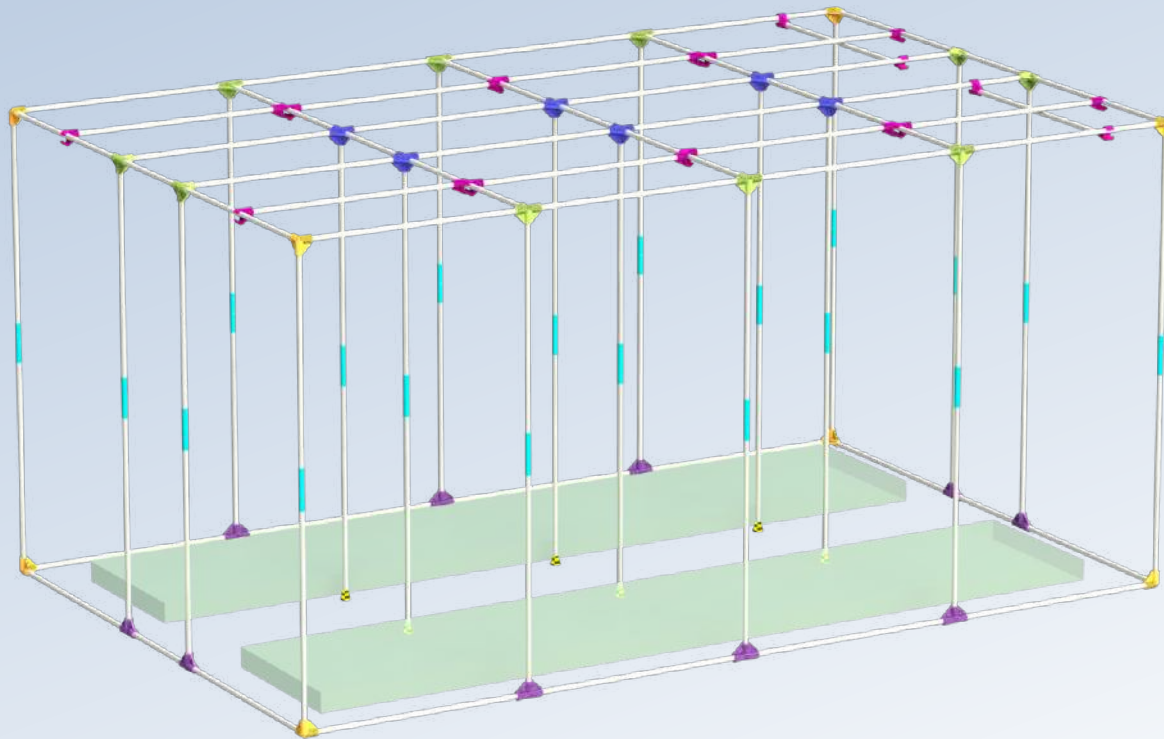

8x C25-Y



10x C25-K



10x C25-T



6x C25-XI



20x C25-H




6x C25-RF



20x T25-Link

 **PROFESSIONAL**

INTENSE 480 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)

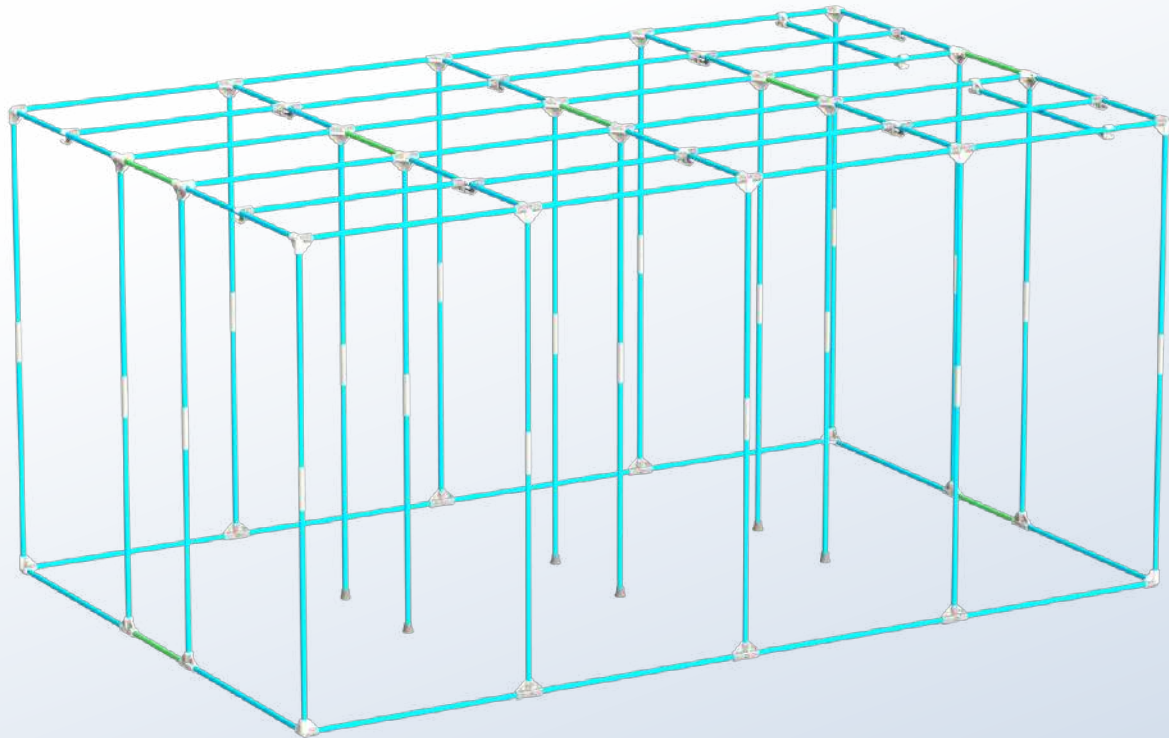

 7x T25-60

 88x T25-120

INT480
CONFIG 1


INT480



CONFIGURATION 2
MAXIMUM STRENGTH

PROFESSIONAL

INTENSE 480 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)

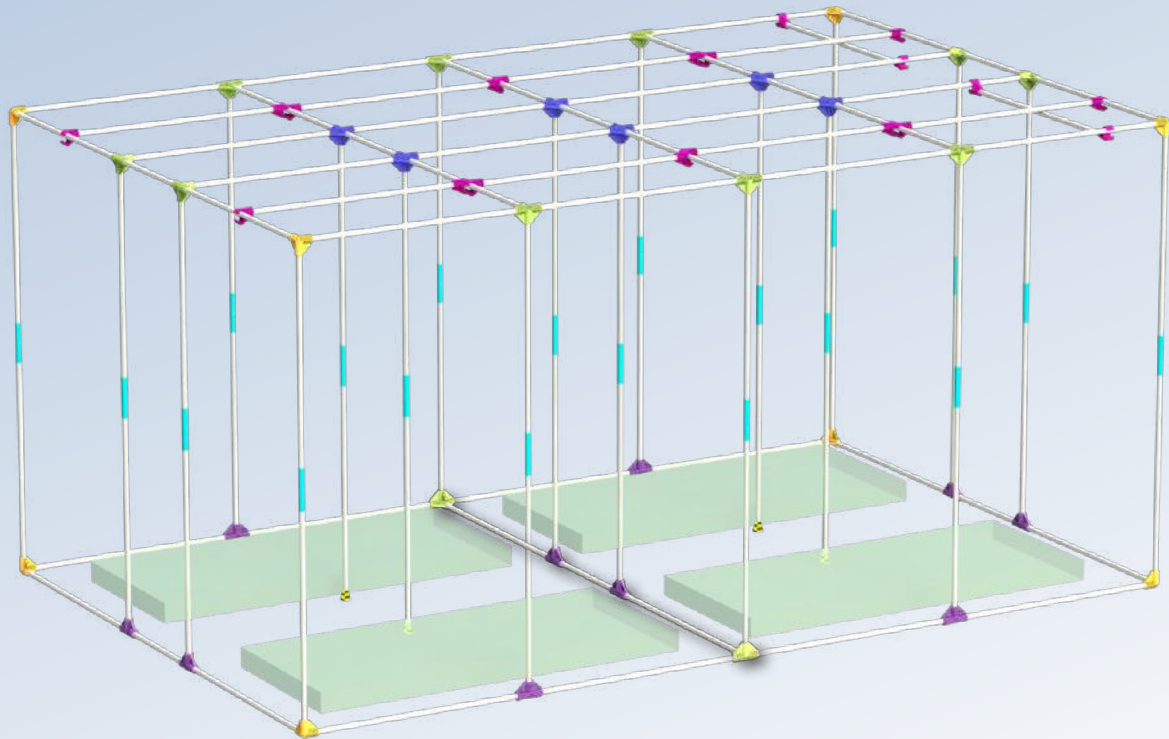

8x C25-Y



12x C25-K



10x C25-T



6x C25-XI



20x C25-H




4x C25-RF



20x T25-Link

 **PROFESSIONAL**

INTENSE 480 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)

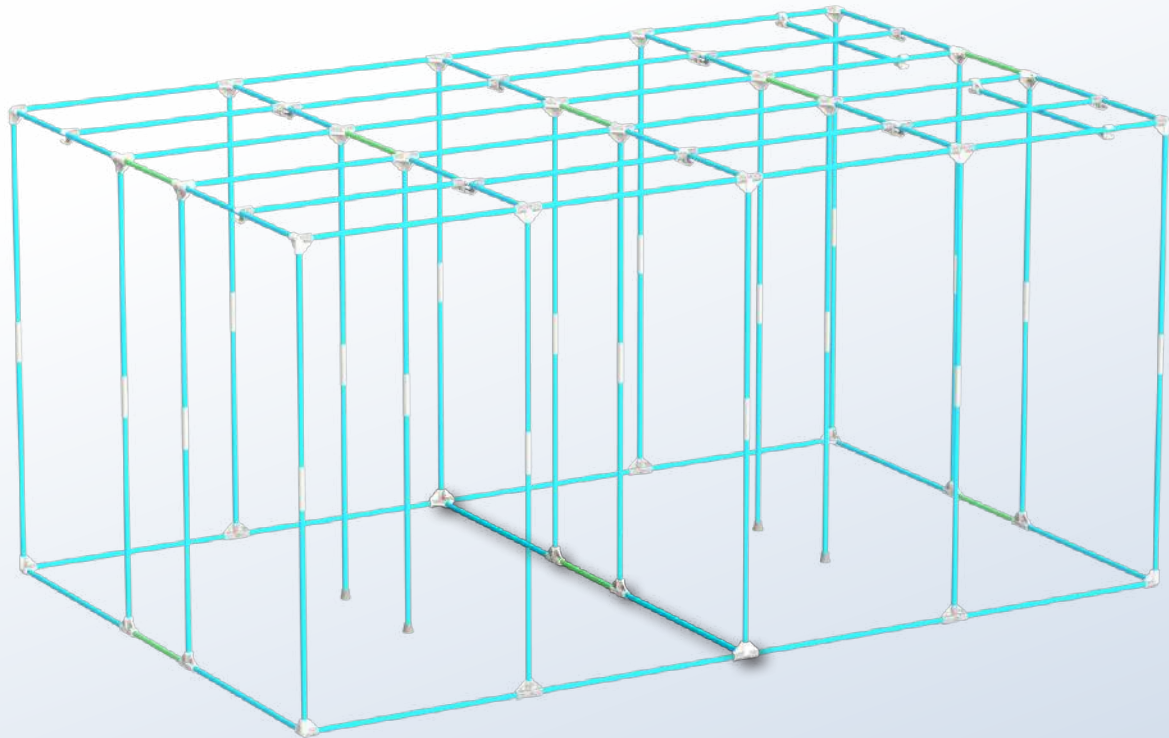

 **8x T25-60**

 **90x T25-120**

INT480
CONFIG 2

INT480




**SPACE BOOSTER & WEBIT
(OPTION)**

 PROFESSIONAL

INTENSE 480 R4.00 - SPACE BOOSTER & WEBIT (OPTION)

OPTION

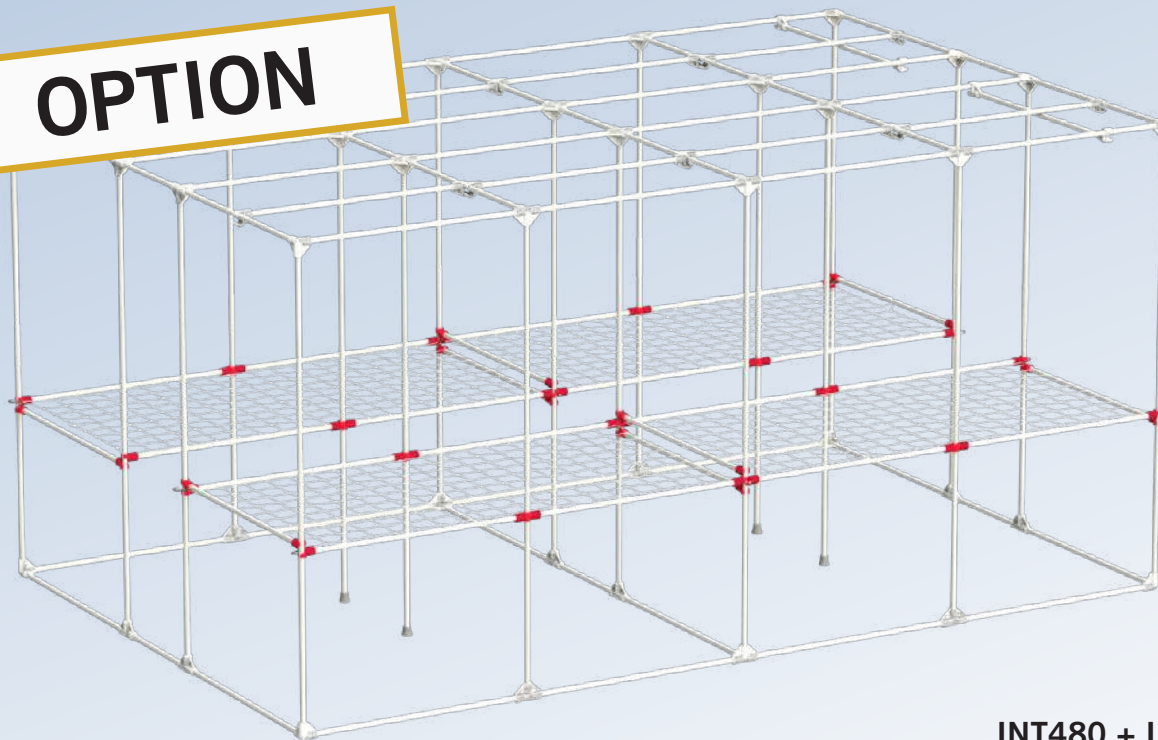

INT480 + INT480K




48x C25-SB

 **PROFESSIONAL**

INTENSE 480 R4.00 - SPACE BOOSTER & WEBIT (OPTION)

OPTION

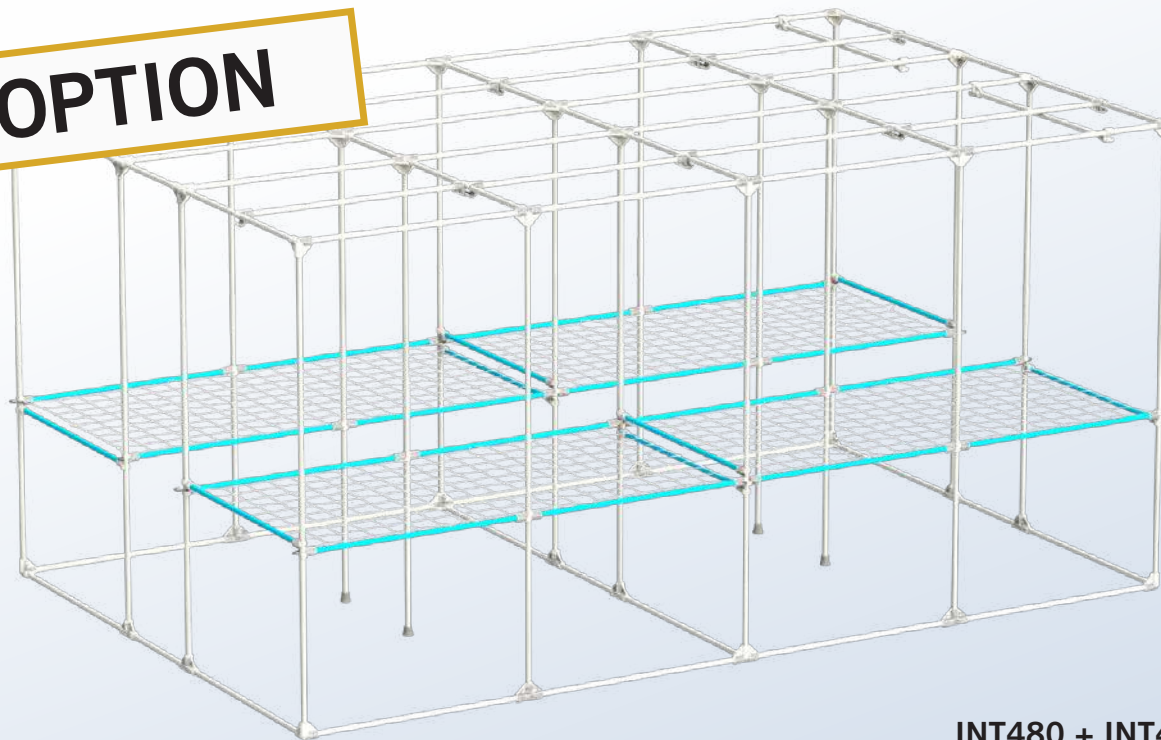

INT480 + INT480K

24x T25-120

INT480K
SE & WEBIT

INT600




CONFIGURATION 1 MAXIMUM ACCESSIBILITY



PROFESSIONAL

INTENSE 600 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)

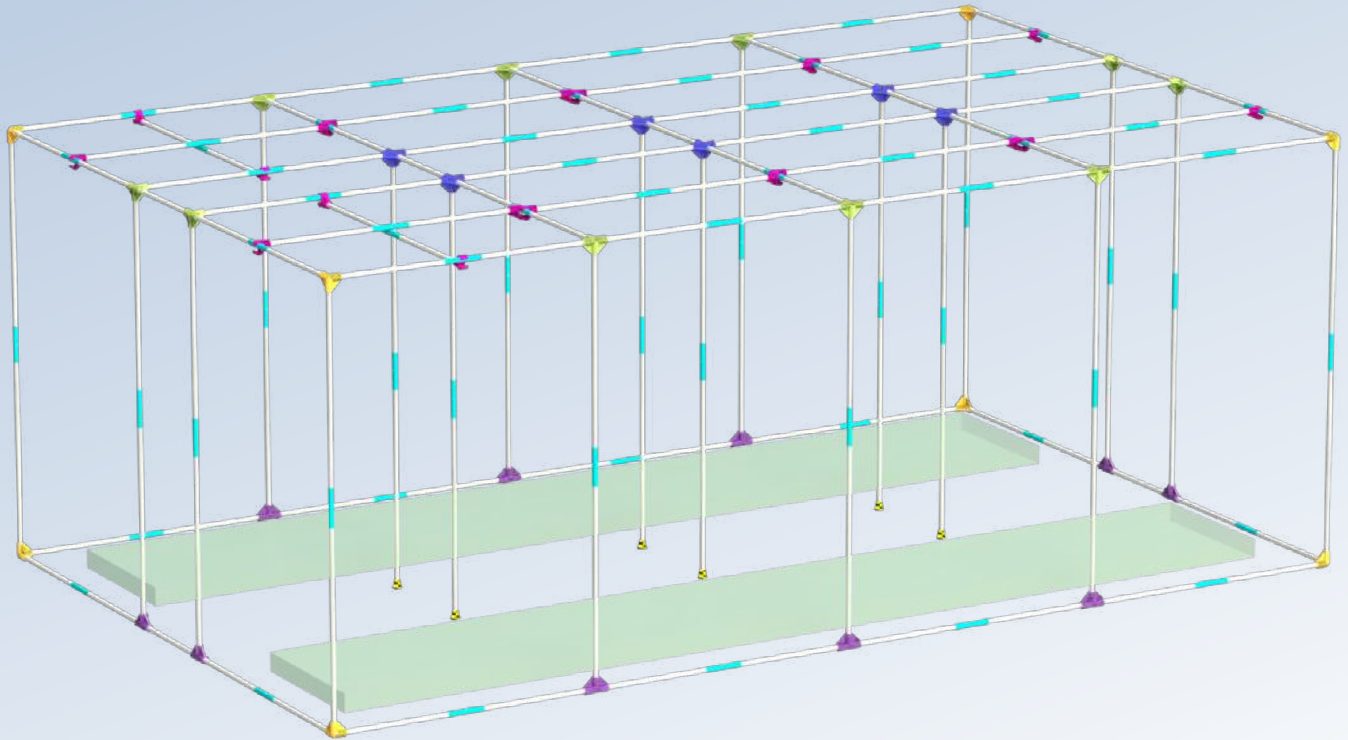

8x C25-Y



10x C25-K



10x C25-T



6x C25-XI



20x C25-H




6x C25-RF



70x T25-Link

 **PROFESSIONAL**

INTENSE 600 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)

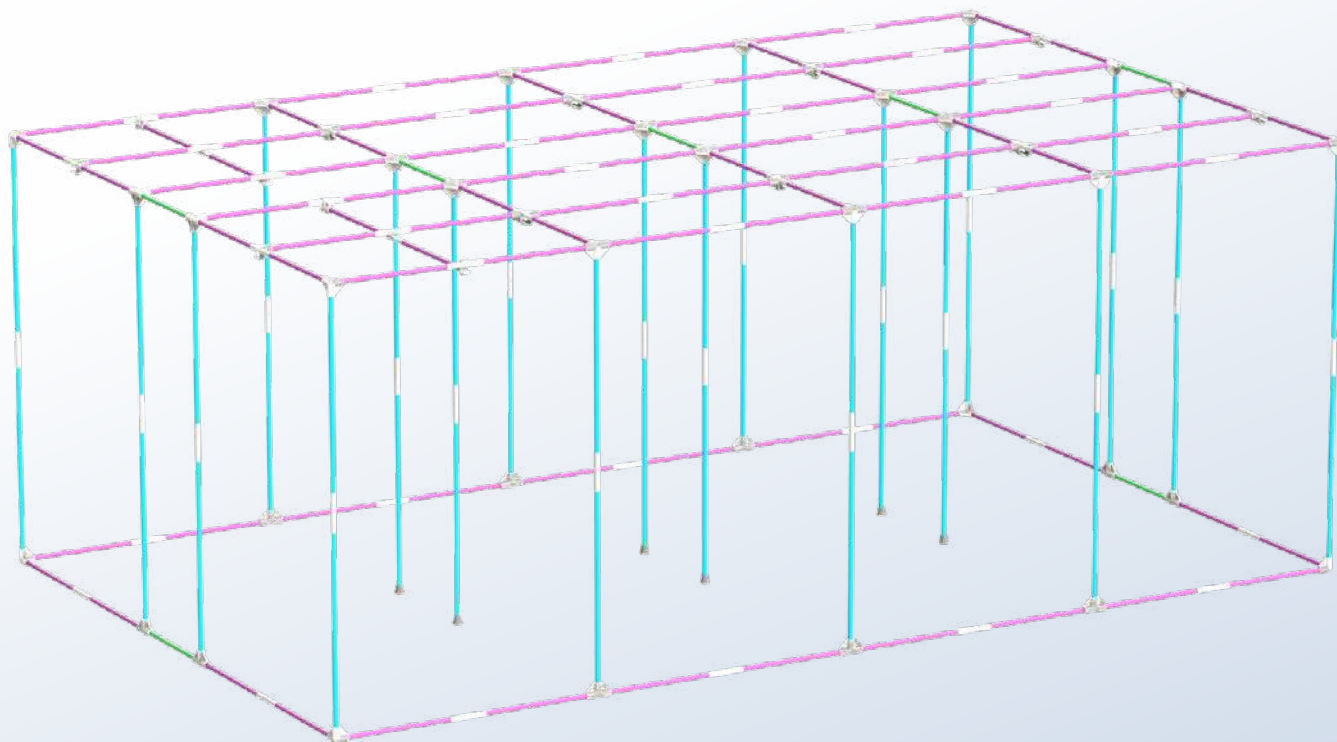

 7x T25-60

 96x T25-75

 40x T25-120


INT600



CONFIGURATION 2
MAXIMUM STRENGTH

PROFESSIONAL

INTENSE 600 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)

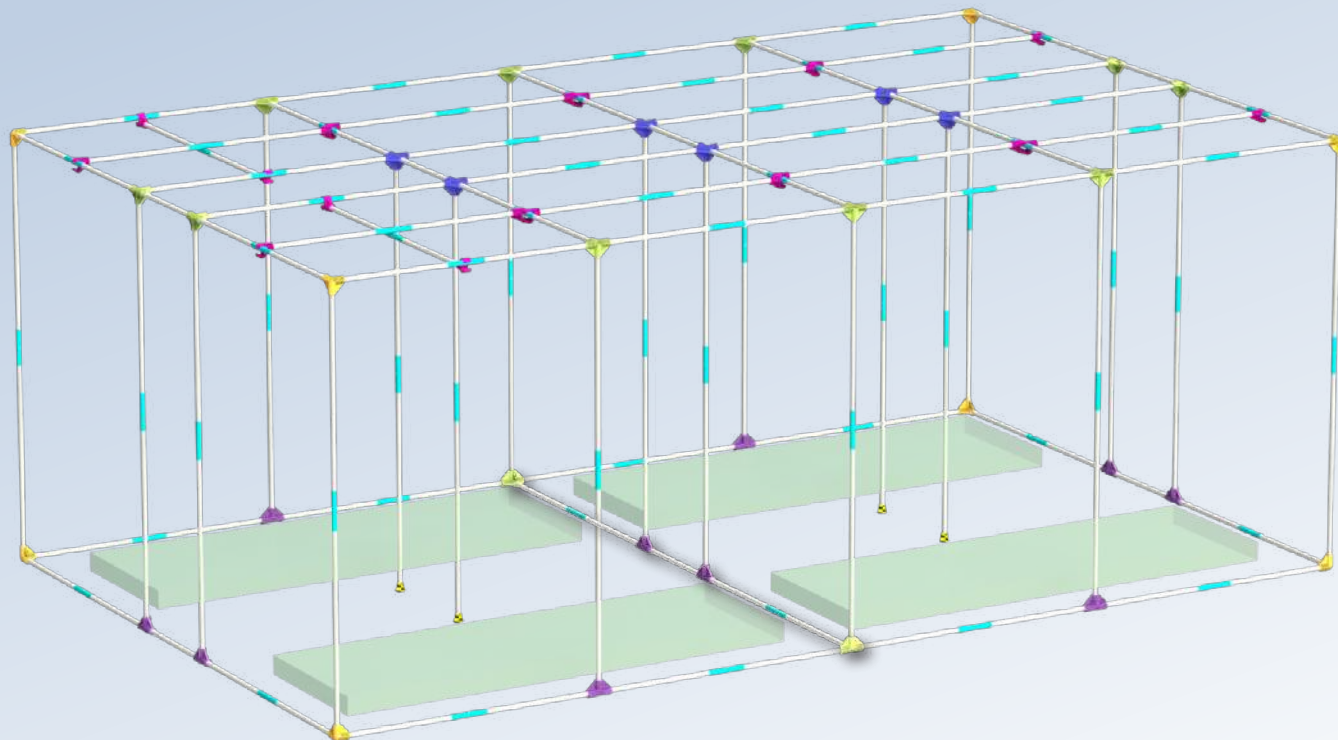

8x C25-Y



12x C25-K



10x C25-T



6x C25-XI



20x C25-H




4x C25-RF



68x T25-Link

 **PROFESSIONAL**

INTENSE 600 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)

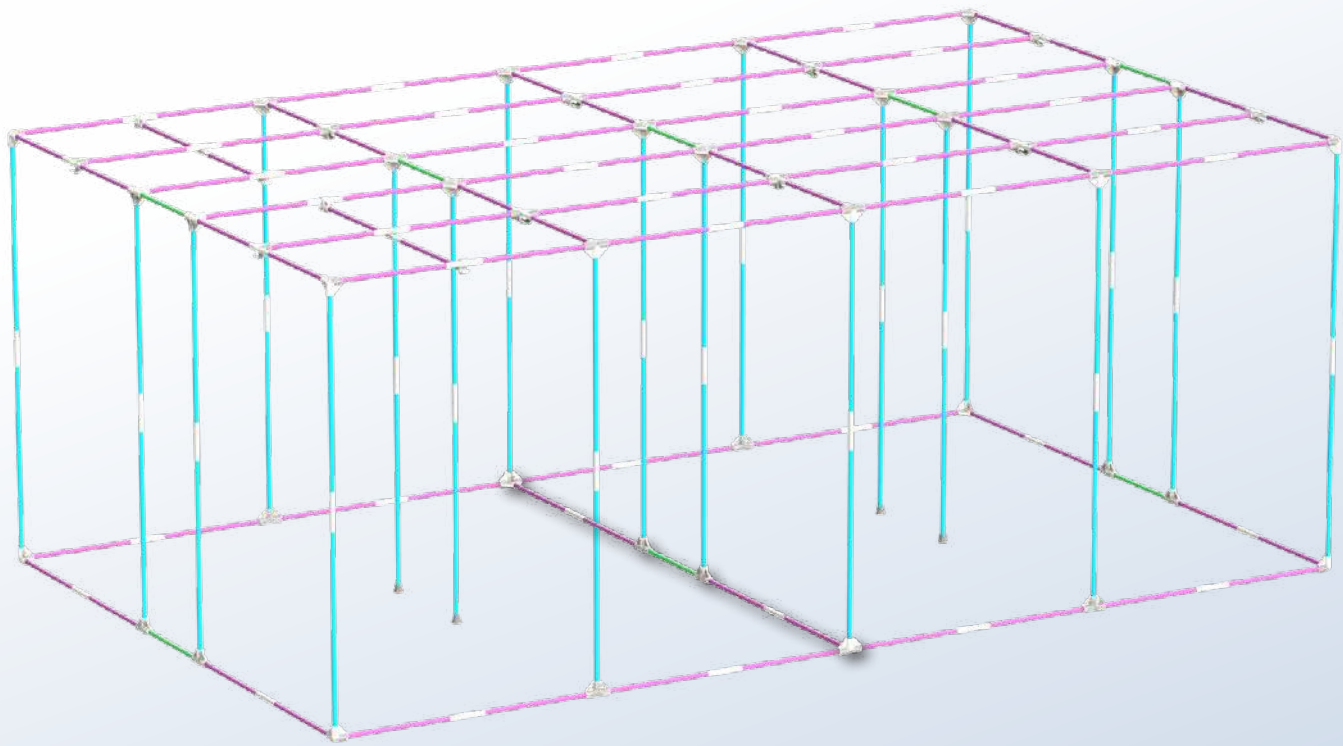

 **8x T25-60**

 **100x T25-75**

 **40x T25-120**

INT600
CONFIG 2

INT600




**SPACE BOOSTER & WEBIT
(OPTION)**

PROFESSIONAL

INTENSE 600K R4.00 - SPACE BOOSTER & WEBIT (OPTION)

OPTION

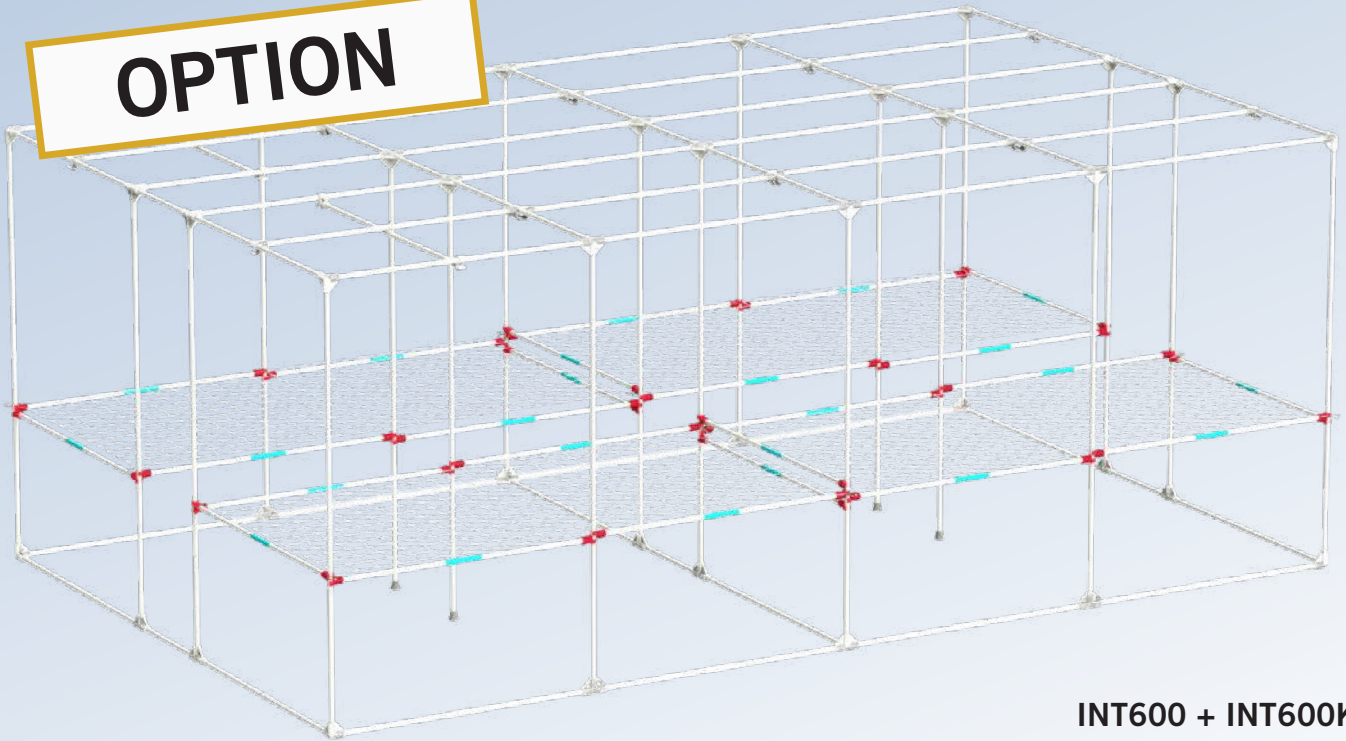

INT600 + INT600K




48x C25-SB



24x T25-Link

OPTION

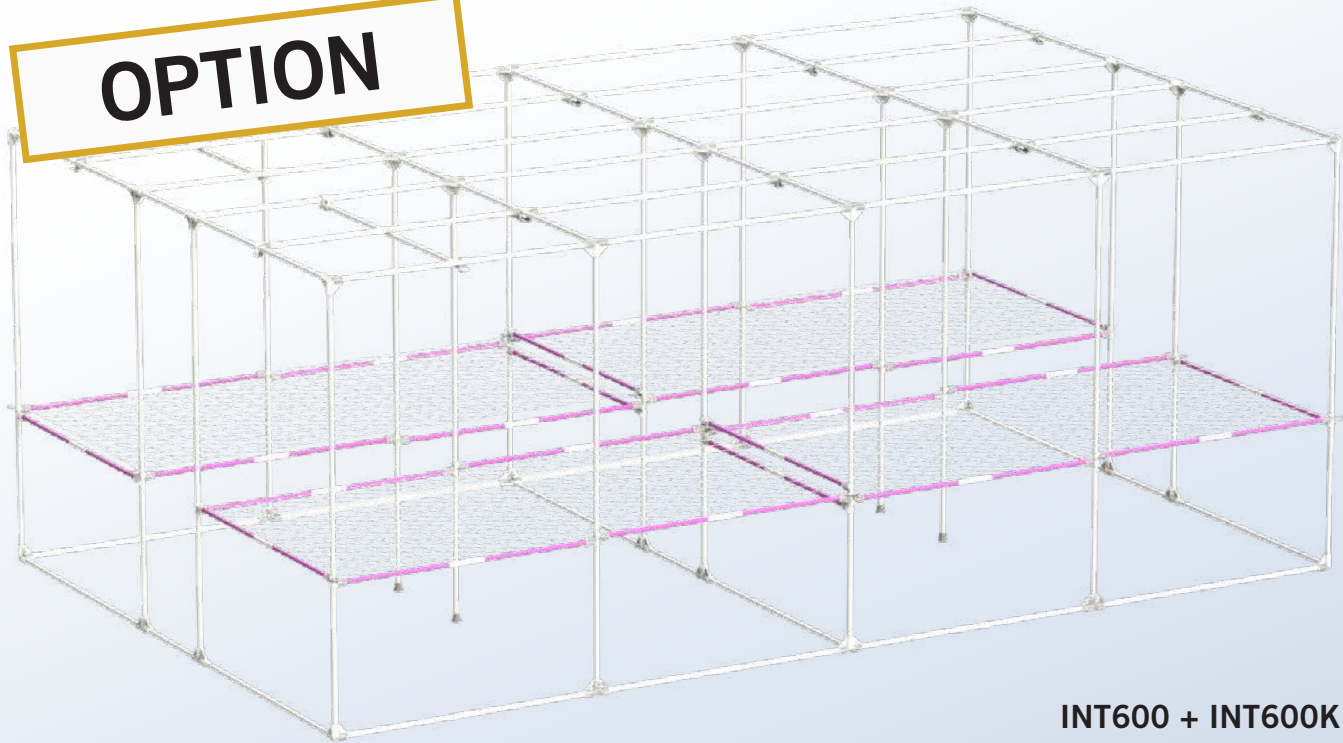


INT600 + INT600K

 48x T25-75

INT480 & INT600



**CANVAS ASSEMBLY
& OPENING METHODS**

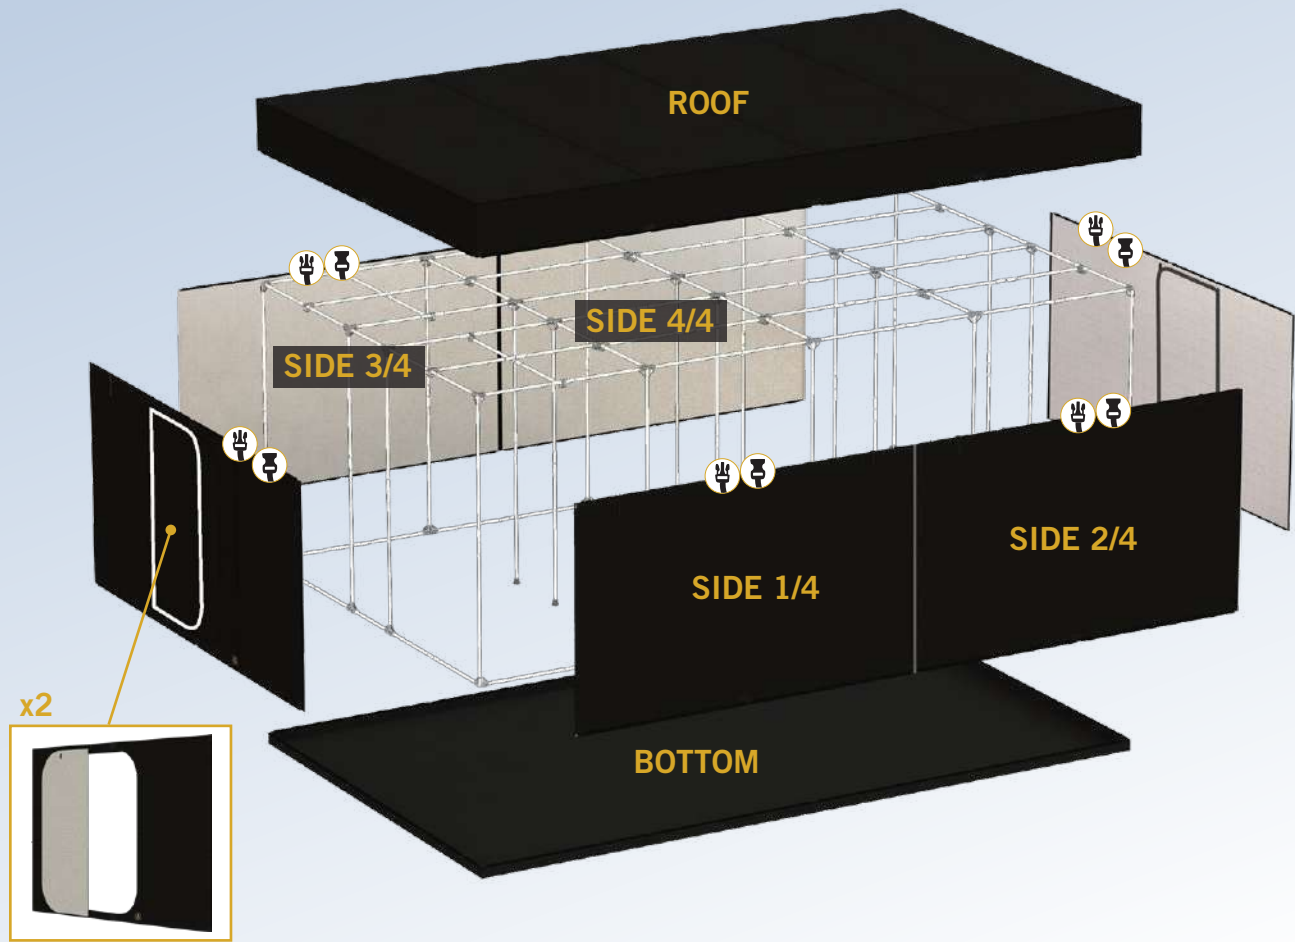





FRONT

SIDE



SOLUTION 1

SOLUTION 1

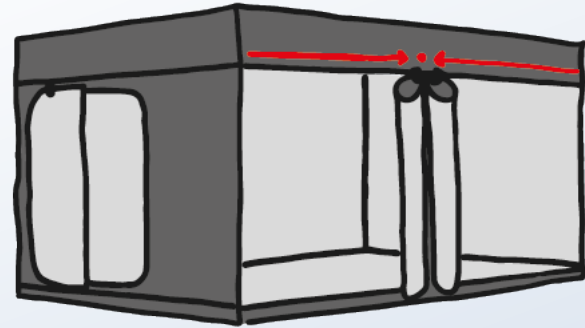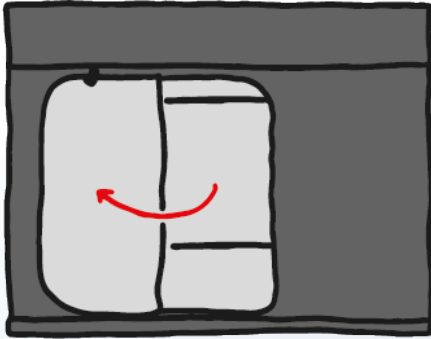

SOLUTION 2


SOLUTION 2

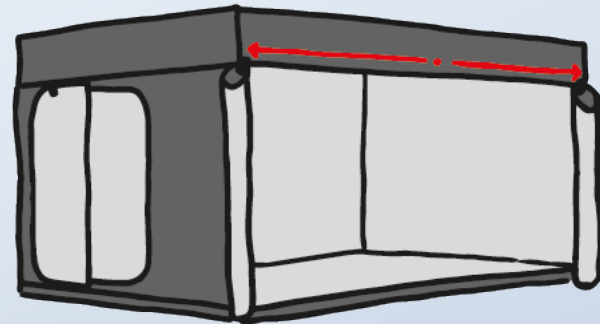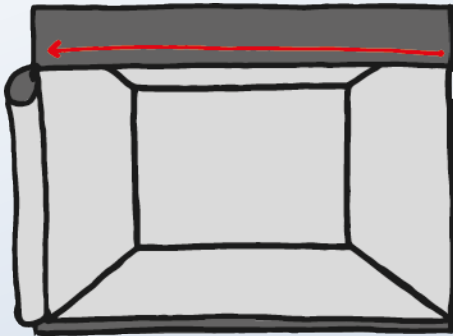

PROFESSIONAL

INTENSE LINKABILITY

FRONT TO FRONT

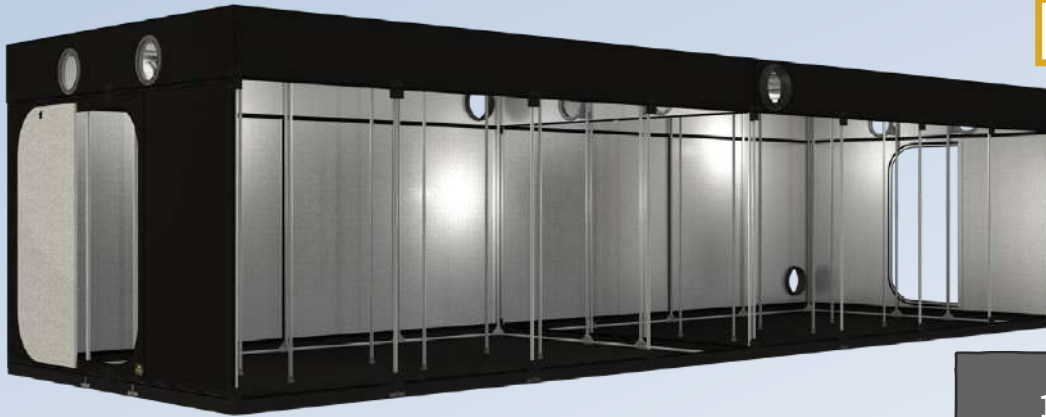

1

2

SIDE TO SIDE




1

2



PROFESSIONAL

INTENSE IN BUILDING

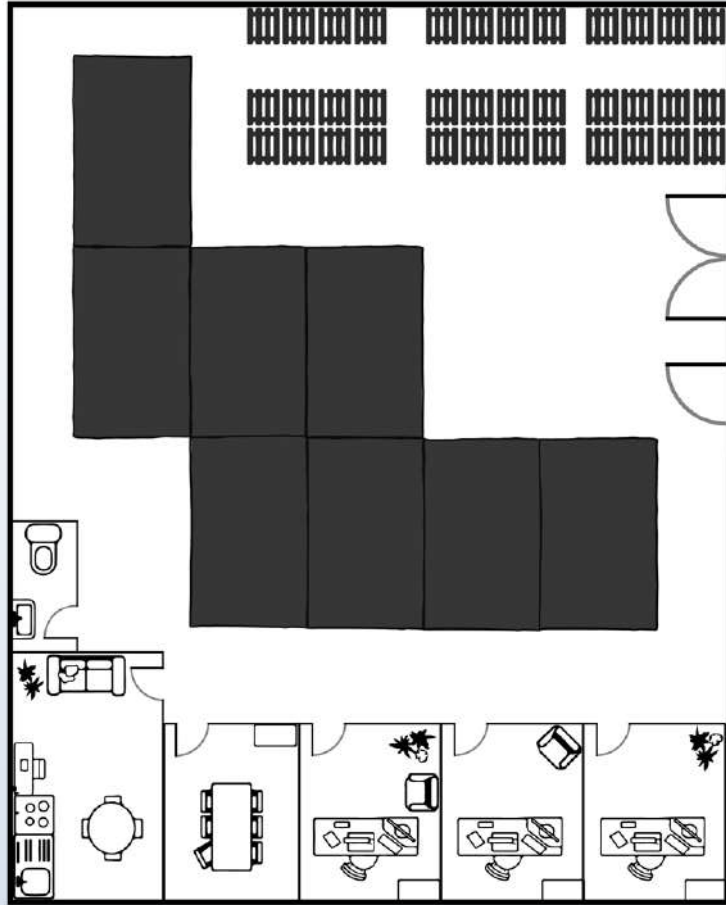

KIT CONTAIN

REF	DESIGNATION	DESIGNATION	INTENSE		INT SPB & WEBIT	
			INT480	INT600	INT480K	INT600K
T25-60	Pole Ø25 mm 600 mm	Pole Ø1.00" 24"	8	8		
T25-75	Pole Ø25 mm 717 mm	Pole Ø1.00" 28"		100		48
T25-100	Pole Ø25 mm 967 mm	Pole Ø1.00" 38"				
T25-120	Pole Ø25 mm 1134 mm	Pole Ø1.00" 45"	90	40	24	
T25-Link	Link Ø25 mm	Link Ø1.00"	20	70		24
C25-Y	Corner Ø25 mm 3 axes Y shape	Corner Ø1.00" 3 axis Y shape	8	8		
C25-K	Corner Ø25 mm 4 axes K shape	Corner Ø1.00" 4 axis K shape	12	12		
C25-T	Corner Ø25 mm 3 axes T shape	Corner Ø1.00" 3 axis T shape	10	10		
C25-XI	Corner Ø25 mm 5 axes XI shape	Corner Ø1.00" 5 axis XI shape	6	6		
C25-H	Handling Corner Ø25 mm	Handling Corner Ø1.00"	20	20		
C25-SB	Space Booster Ø25 mm	Space Booster Ø1.00"			48	48
C25-RF	Rubber Feet Ø25 mm	Rubber Feet Ø1.00"	6	6		



info@secretjardin.com



[Secretjardin_](#)



[Secret Jardin Official](#)



[Secret Jardin](#)



www.secretjardin.com